


Safety Warnings

The following diagrams illustrate the precautions to be taken when using your CD-R/RW drive.

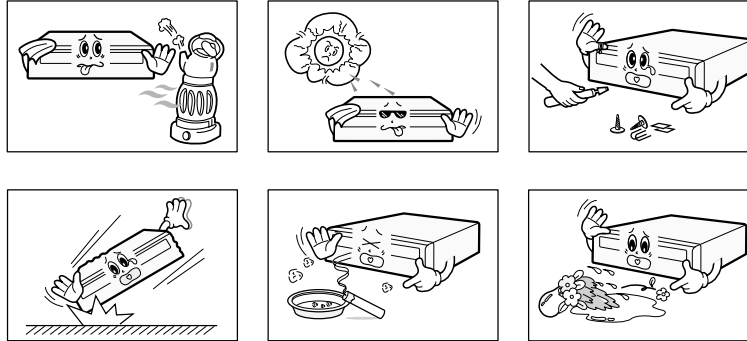

User's Guide - ENGLISH

You must not use the drive in any manner other than that specified in this guide.

CAUTION Do not attempt to repair the CD-R/RW drive yourself. Contact your dealer or local SAMSUNG representative for all repairs.


Use of controls or adjustments or performance of procedures other than those specified here in may result in hazardous radiation exposure.

To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.

WARRANTY Please refer to the Samsung limited warranty statements.

[http : //www. samsungelectronics. com.](http://www.samsungelectronics.com)

Front View of the CD-R/RW Drive

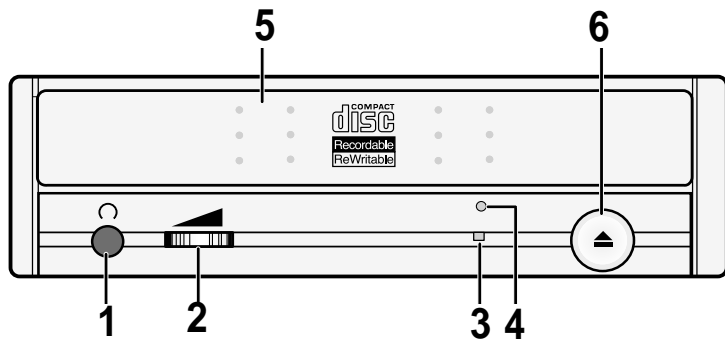

1 Headphone Connector

The audio output connector enables you to plug stereo headphones into the drive. It requires a 3.6mm stereo mini-jack.

2 Volume Control Dial

This control dial adjusts the volume for your headphones. You can only use the headphone jack and volume control when you have installed the required software utilities. For example, the Microsoft Windows Media player can be used.

3 Reading/Writing LED

When you play a disc.(ORANGE)

4 Emergency Hole

If the disc tray does not open when you press the Open/Close button, insert a small, metal rod(an unwound paper clip for example) into this hole to eject the disc.

☛ This function should only be performed when the computer is powered OFF.

5 Disc Tray


The Disc Tray opens and closes automatically when you press the Open/Close button.

◆ When you place a disc in the tray, make sure that the label on the disc is facing upwards. If you are not loading or unloading a disc, the disc tray should remain closed.

6 Open/Close-Button

Press open/close key.

Rear View of the CD-R/RW Drive

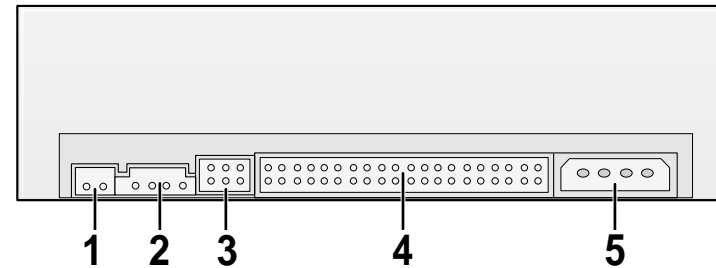

1 Digital Audio

You can connect a sound card or MPEG card which support Digital Audio to your drive using this two-pin connector.

2 Audio Output Connector

You can connect a sound card to your drive using this four-pin connector.

☛ This function is not covered in detail in this guide. Refer to the documentation supplied with your sound card.

3 Device Configuration Jumper

Usually, this is a pre-set configuration as illustrated below:



☛ Verify that the setting is as illustrated. If it is not, simply remove the jumper and place it in the correct position.

4 Host IDE Interface Connector

This input/output interface connector is used to connect the 40-pin flat cable from the IDE interface to the CD-R/RW drive.

5 Power Connector

The power connector is a four-conductor male plug.

System Requirements

Before you install the CD-R/RW drive, we strongly recommend that you make certain that your set-up meets the system requirements listed below.




Item	Description
Type of computer	Pentium 133MHz(or higher) with an IDE interface (For 6X writing, 166MHz recommended)
RAM	16MB RAM(or higher) (Recommend 32MB)
Hard drive	528MB higher(Transfer Rate 800KB/sec higher, Access Time 20msec Lower)
MS-DOS	5.0(or higher) TIP:For MS-DOS, The CD-R/RW drive can only Read a disc without Premaster Software
Windows	Microsoft® Windows 95®, 98® or Windows NT 4.0® TIP:For Windows NT®, we recommend Service Pack3.

Installing the CD-R/RW Drive

Install the CD-R/RW drive in your computer horizontally, making sure that the Open/Close button is on the right.

To install the drive, proceed as follows.

- 1 Turn OFF your computer. Remember to verify the configuration jumper on the rear of the CD-R/RW drive.
- 2 Remove the cover of your PC(main unit of the computer).
- 3 Remove the blank cover panel of the 5.25 inch unit in which the CD-R/RW drive is to be installed.
- 4 Connect the CD-R/RW drive to the IDE interface and power cables located inside your computer.
 - ← Connectors are keyed so it is impossible to put them in an incorrect position. Do not force the connectors, if they do not seem to fit.
- 5 Install the CD-R/RW drive into the unit and secure it with mounting screws (recommended standard M3x6).
 - ← ◆ Depending on your PC model, you may need to attach guide rails to the drive, so that the drive is held firmly in place. On the ground that the guide rails are parts of the computer, if you don't have these, please purchase separately.
 - ◆ If you use screws that are longer than the recommended standard, you may damage the drive.
- 6 Put the cover back on your PC.



Installing the Device Driver

You can install the device driver for DOS or for Windows.

TIP : You can use the CD-R/RW drive to only read a disc in DOS/Windows 3.1.

* Device Driver is located at [DDriver] folder of bundle [Recording S/W CD]

- 1 Turn on your computer and wait for it to boot.
- 2 Insert the bundle CD into CD-R/RW driver.
- 3 Windows 95/98 user
 - ◆ When you are in Windows 95/98 or NT, it is not necessary to install Device Driver. Whereas, when you are in Dos Mode of Windows 95/98 or NT, then install as follows.
 - ◆ Click on **MY COMPUTER** icon.
 - ◆ Click on the **CD-R/RW** icon.
- 4 Run the CDSETUP program:

Windows user	Double-click CDSETUP.EXE of [DDRIVER] folder from the Windows File Manager.
- 5

To...	Then click...
Confirm the installation	OK
Exit without installing	CANCEL

Result: If you answer Y(OK), the installation program automatically

 - ◆ Creates a SAMSUNG directory on your hard disk
 - ◆ Copies the required softwares (mscdex.exe and sscdrom.sys)
 - ◆ Modifies the CONFIG.SYS and AUTOEXEC.BAT files
- 6 When the **Setup Completed** screen is displayed, remove the installation disk from the drive.
- 7 Reboot your system.

Result:

 - ◆ The computer restarts
 - ◆ Both the device driver and MSCDEX are loaded.

Changing the Drive and Driver Settings

TIP : You can use the CD-R/RW drive to only read a disc in DOS/Windows 3.1.

Your CD-R/RW drive is controlled by:

- ◆ MSCDEX.EXE (a Microsoft extensions program)
- ◆ SSCDROM.SYS (the CD-R/RW device driver)

MSCDEX.EXE Parameters

The MSCDEX.EXE parameters are added to your AUTOEXEC.BAT file. Below is the syntax for each parameter. Information indicated within squarebrackets [] is optional.

<Drv:>\<path>\MSCDEX.EXE [/E/K/S/V] /D:<drive name> [/L:<drive letter>] [/M:<buffer>]

Example : The default set-up procedure adds the following default settings to your AUTOEXEC.BAT file:
C:\SAMSUNG\MSCDEX.EXE /D:SSCD000

Details for each parameter are listed below.

Parameter	Details
/D:<drive name>	Specifies the name of the top CD-R/RW drive. The <drive name> field must contain the same information as specified by parameter in your CONFIG.SYS file (which loads the corresponding CD-R/RW drive). ☛ The MSCDEX command must have at least one /D parameter. If you add another CD-R/RW device, you must add and specify a corresponding /D parameter for each new drive.
/E	If the EMS memory mode (Expanded Memory Support) is enabled, this parameter specifies that the CD-R/RW driver can save sector buffers using EMS memory.
/K	Specifies that MS-DOS can recognize a CD-R/RW volume written in kanji (Chinese characters). Must be used for all CD-R/RW volumes written in kanji.
/S	Permits the CD-R/RW drive to be shared on the MS-NET or Windows for Work Groups server.
/V:	When MSCDEX.EXE is loaded, this parameter indicates the memory status.
/L:<drive letter>	Specifies the letter of the top CD-R/RW drive. If more than one CD-R/RW drive is connected, the system automatically assigns arbitrary drive names to the additional drives.
/M:<buffer>	Specifies the number of sector buffers.

SSCDROM.SYS Parameter

The SSCDROM.SYS parameters are added to your CONFIG.SYS file. Below is the syntax for each parameter. Information indicated within square brackets [] is optional.

DEVICE=<Drv:>\<path>\SSCDROM.SYS /D:<drive name> /V

Example : The default set-up procedure adds the following default settings to your CONFIG.SYS file:
Device=C:\SAMSUNG\SSCDROM.SYS /D:SSCD000 /V

Details for each parameter are listed below.

Parameter	Details
/D:<drive name>	Changes the name for the CD-R/RW drive. Up to eight characters can be input. <u>Default</u> : SSCD000
/V	Version number display

Resolving Technical Problems

☛ Please consult the following table BEFORE contacting your dealer or local SAMSUNG representative.

Problem	Meaning/Solution						
The software installation failed	◆ Check that your hard disk is not full.						
I re-booted my PC and it paused during the start-up program.	After installing the device driver, your system start-up program may take more time than expected. If it does not start-up after 60 seconds, verify your AUTOEXEC.BAT file and, if necessary, contact your local computer dealer.						
The disc tray does not open.	The drive may not be installed correctly. Verify the physical installation.						
In the File Manager, the CD-R/RW icon does not display.	<table border="1"> <thead> <tr> <th>If you have installed the CD-R/RW drive...</th> <th>Then...</th> </tr> </thead> <tbody> <tr> <td>And the software</td> <td>Re-boot your PC.</td> </tr> <tr> <td>And have not installed the software</td> <td>Install the software following the instructions on page 5.</td> </tr> </tbody> </table>	If you have installed the CD-R/RW drive...	Then...	And the software	Re-boot your PC.	And have not installed the software	Install the software following the instructions on page 5.
If you have installed the CD-R/RW drive...	Then...						
And the software	Re-boot your PC.						
And have not installed the software	Install the software following the instructions on page 5.						
I installed the software and re-booted my PC. The CD-R/RW drive icon/directory still does not appear.	<ul style="list-style-type: none"> ◆ Verify the connections between the drive and your PC. Check that the 40-pin flat cable is connected to an IDE interface (some PCs are equipped with an SCSI disk interface). ◆ Verify your AUTOEXEC.BAT file. Go to page 6 for the verification procedure. ◆ Check the LASTDRIVE= command in the CONFIG.SYS file. The specified letter must take the CD-R/RW volume into account. If you do not know which letter is assigned to the CD-R/RW, enter Z. ◆ Using the documentation provided with your PC, check that the IDE hard disk is set up in MASTER mode. 						

Technical Specifications


SAMSUNG continually strives to improve its products. Both the design specifications and these user instructions are thus subject to change without notice.

SECTIONS		SW-206	
DISC	Reading Disc Types	CD-DA, CD-ROM Mode-1, CD-ROM XA Mode-2 Form-1, Form-2, Photo-CD (Single, MultiSession), Video CD ready, CD-Plus/ CD-Extra/ Enhanced CD, CD-I FMV	
	Writing Disc Kinds	CD-R, CD-RW	
	Erasing Disc Kinds	CD-RW	
	Disc Diameter	12 cm or 8 cm	
DRIVE PERFORMANCE	Data Transfer Rate	Write(CD-R)	150KB/sec(1X), 300KB/sec(2X), 600KB/sec(4X) 900KB/sec(6X)
		Write(CD-RW)	300KB/sec(2X), 600KB/sec(4X)
		Read	3600KB/sec(MAX) PIO Mode 3, DMA Mode 1
	Access Time (Random)	120ms (Typical)	
	Data Buffer Capacity	2MB	
	Laser	Semiconductor Laser	
	Side Motor	Gear Motor	
	Spindle Motor	Brushless Motor	
	Loading Mechanism	Tray, DC motor(Soft Eject)	
	WRITING METHOD	Disc At Once, Track At Once, Variable Packet Writing, Fixed Packet Writing	
ERROR RATE	Mode 1: 1 block/10 ¹² , Mode 2: 1 block/10 ⁹		
FRONT PANEL	Eject Button	Auto Eject or Auto Inject	
	Orange indicator(LED)	Playing a disc	
	Headphone Output	Stereo Mini-jack(Ø3.6mm) 0.48±0.1Vrms, 100Ω	
	Volume Control	Wheel Type	
REAR PANEL	Required Power	+5VDC 2.0A, +12VDC 0.7A (MAX)	
	Interface Connector	ATAPI (EIDE)	
	Audio Output	Line out 0.70 ±0.1Vrms, 47kΩ	
	Jumper Block	Device Configuration Jumper(MOLEX 70203)	
OPERATING ENVIRONMENT	Work Area	Temperature : 5~40°C, Humidity : 5~90%	
	Storage Area	Temperature : -30~65°C, Humidity : 5~95%	
GENERAL	Dimensions	148.4(W) x 42.5 (H) x 198(D)mm (Including Bezel)	
	Weight	1.5Kg	
RELIABILITY	MTBF	100,000 POH (Duty 25%)	
	Disc Compartment Loading	30,000 times	

Check the CD-R/RW Drive (Windows 95/98 or NT 4.0)

Check the CD-R/RW Drive

You must check the CD-R/RW drive to operate rightly in the Windows 95/98 or NT 4.0

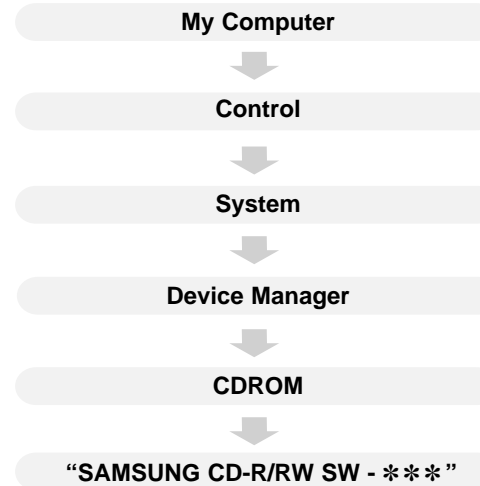

Check the Writing Software

You must check the CD-R/RW drive to operate rightly in the writing software.

